



COUNTY OF ACCOMACK

FINANCE DEPARTMENT

23296 Courthouse Ave – Suite 204|P.O. Box 620|Accomac, Virginia 23301
Telephone:(757) 787-5709 | Fax: (757) 787-2468

Amy Ford
Deputy Director of Finance

ADDENDUM NO. 2

To Bid Documents for

EASTERN SHORE REGIONAL LIBRARY

IFB No.: 716

Date: April 22, 2019

To All Concerned:

The original Bid Documents, for IFB No. 716 of the County of Accomack are amended as noted in this Addendum No.2, and the Addendum shall become part of the Bid Documents. Bidders must acknowledge receipt of this Addendum during the bidding process by signing the Bid Proposal/Contract Forms when submitting proposals.

Pre-Bid Questions


1. Question: Is MC cable acceptable for wiring?
Response: The Per specification section 260519 2.1 C., MC cable shall not be allowed.
2. Question: Also, will this job require a performance bond and is there any wage scales?
Response: Yes, a performance bond will be required. No, there are no wage scales.
3. Question: Please find attached our Request for Approval letter along with information on Norton Access Ceiling Systems that are equivalent to the product specified for this project.
Response: The Norton Access Ceiling system is an acceptable substitution for the Armstrong Woodworks product listed in the project manual.

4. Question: We have customers interested in the EIFS cladding portion of the project, but our Senergy brand is not currently referenced in the project documents. I was hoping that to verify our Channeled Adhesive CI Design System would be acceptable for this project?

Response: BASF is an acceptable equal to the manufacturers listed in the project documents.

5. Question: The prints are not clear on what the preaction system will have to protect. Can we get that clarified?

Response: Contractor to refer to Sheet P202 Note 3 and the callout box on plan. The document indicates Rooms 141, 115 and 114A to be applicable.

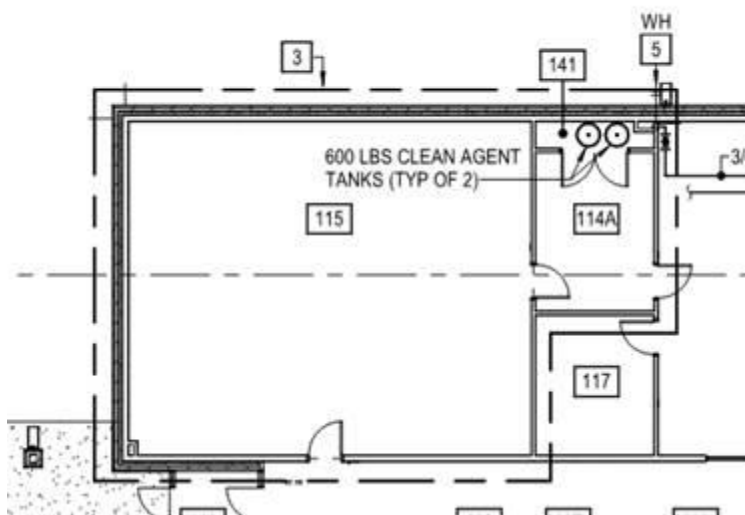

3 THIS AREA SHALL BE PROTECTED WITH A CLEAN AGENT FIRE SUPPRESSION SYSTEM. EXTEND PREACTION SPRINKLER SYSTEM TO PROVIDE COVERAGE FOR THIS AREA. SEE DETAIL, SHEET P005, FOR FURTHER INFORMATION.

6. Question: I would like to propose an equal to the specified Baystone and Red Velour modular by General Shale on your project. Are Meridian Columbia Architectural Series Red (222) Wire Cut Modular and Meridian Columbia Architectural Series Dark Palomino (739) Wirecut Modular acceptable equals? Both would be under heading Face Brick ASTM 216 SW Type FBS.

Response: Meridian Columbia Architectural Series Red (222) Wire Cut Modular is an acceptable equal to General Shale Red Velour and Meridian Columbia Architectural Series Dark Palomino (739) Wirecut Modular is an acceptable equal to General Shale Baystone.

7. Question: Can the requirement for AISC certification be waived?
Response: Yes, only for the fabricator. The installer must be AISC certified. The wording of the fabricator note under the quality insurance section in the steel spec is revised as follows:
- A. Fabricator Qualifications: Fabricator must participate in the AISC Certification Program and be designated and AISC-Certified Plant or he shall employ an approved independent inspection or quality control agency to conduct periodic, in plant inspections at the fabricator's plant, at a frequency that will assure the fabricator's conformance to the requirements of the inspection agency's approved quality control program as required by the VUSBC (Virginia Uniform Statewide Building Code), 2015 edition.
8. Question: A507 – B5 shows solid surface sills. Are these only required at SF2 windows as shown per A303 - A1? Also, which finish SS1 or SS2?
Response: Solid surface window sills are SS2. Please refer to window details for locations.
9. Question: Please clarify finish schedule for cabinets and counter tops, it is unclear whether cabinets are to be PLAM1 or PLAM2, also whether tops are to be PLAMx, SS1 or SS2, or QTZ1? Notes on A701 seem to call this out but having trouble locating the appropriate areas they reference.
Response:
- A. Note 2 states in Rooms 106 and 107, provide SS1 with apron PLAM2.
 - B. Note 3 states in Room 139, provide SS1 with PLAM2.
 - C. Note 4 states in Room 118, provide QTZ1 with PLAM1.
 - D. Note 18 states in Rooms 113, 126, 130, provide SS2 with PLAM2.

END OF ADDENDUM NO. 2